


Contact us at Zano Controls,  
 Unit 1 Chantry Court,  
 Wrythe Lane,  
 Carshalton,  
 Surrey,  
 SM5 2DG.  
 Tel: 0845 519 5858  
 Fax: 0845 519 5757  
 email: sales@zanocontrols.co.uk



ZGRIDLED+ TECH SHEET  
 MADE IN GREAT BRITAIN

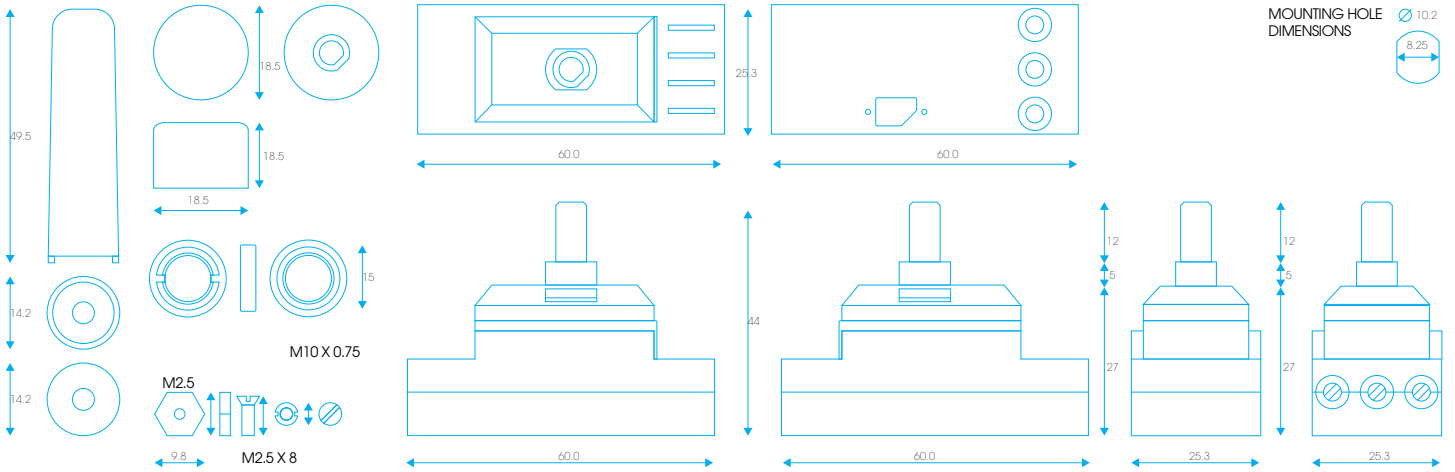

NEUTRAL REQUIRED	NO
FLOURESCENT COMPATIBLE	NO
GU10 MAINS HALOGEN COMPATIBLE	NO
LV TRANSFER COMPATIBLE	NO
2-WAY SWITCH	YES
ON / OFF OPERATION STYLE	PUSH ON / PUSH OFF
DIMMING OPERATION	ROTARY


OVERLOAD PROTECTION	YES
SMART SETTINGS	YES
DB NOISE DURING OPERATION	- 110 DBA
SOFT START	YES
SUPPLY VOLTAGE	110V- 240V AC
FREQUENCY RANGE	40 - 50Hz +/- 10%
OPERATING TEMPERATURE UNDER FULL LOAD	70° C
HUMIDITY RANGE	95% NON CONDENSING
MAX AMBIENT TEMPERATURE	40° C
MINIMUM AMBIENT TEMPERATURE	0° C
MAX LOAD	250W LED
MIN LOAD	5W LED
TERMINAL TORQUE MAX SETTING	0.4 NM
MAX TERMINAL CAPACITY	3mm
MAX SWITCHING CAPACITY	4A RESISTIVE

#### MAXIMUM PLATE LOAD RECOMMENDATIONS

COVER PLATE SIZE (WXH)	LED
SINGLE GANG 76MM X 76MM	250W
DOUBLE GANG 137MM X 76MM	360W*

\*If you are fitting more than two dimmers in the same box each dimmer must be de-rated to a maximum load of 160w per dimmer.

#### DIMMER

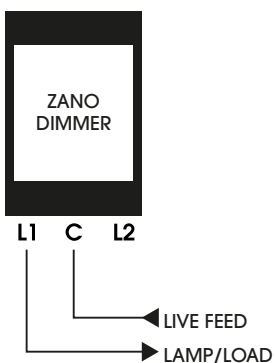

#### 2-WAY SWITCH AND DIMMER

