


Contact us at Zano Controls,
 Unit 1 Chantry Court,
 Wrythe Lane,
 Carshalton,
 Surrey,
 SM5 2DG.
 Tel: 0845 519 5858
 Fax: 0845 519 5757
 email: sales@zаноcontrols.co.uk



ZLINE TECH SHEET
 MADE IN GREAT BRITAIN

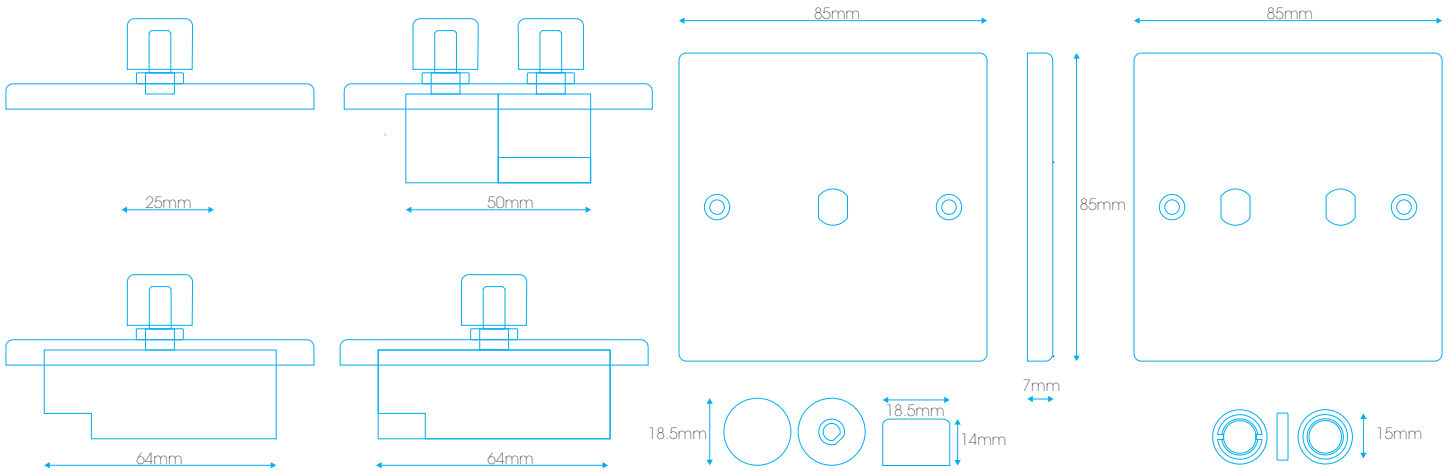


COMPATIBLE LOAD TYPE	LED
2-WAY SWITCH	YES
ON / OFF OPERATION STYLE	PUSH ON / PUSH OFF
DIMMING OPERATION	ROTARY

PROTECTION	OVERLOAD/THERMAL
SMART SETTINGS	YES
DB NOISE DURING OPERATION	- 110 DBA
SOFT START	YES
SUPPLY VOLTAGE	110V- 240V AC
FREQUENCY RANGE	40 - 50Hz +/- 10%
MAX OPERATING TEMPERATURE	70° C
RH RANGE	0% - 95% NON CONDENSING
MAX AMBIENT TEMPERATURE	0° C - 40° C
MINIMUM AMBIENT TEMPERATURE	0° C
MAX LOAD*	120W/VA 250W/VA
MIN LOAD*	5W/VA
TERMINAL TORQUE MAX SETTING	0.4 NM
MAX TERMINAL CAPACITY	3mm
MAX SWITCHING CAPACITY	4A RESISTIVE

PLATE MODULES	120W	250W
1 GANG	1 X 120W	1 X 250W
2 GANG	2 X 120W	2 X 250W

* Per Dimmer

DIMMER

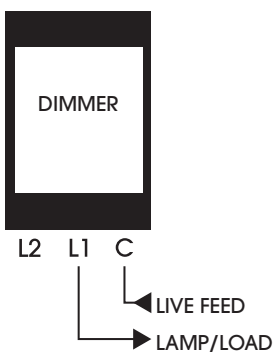

2-WAY SWITCH AND DIMMER

